
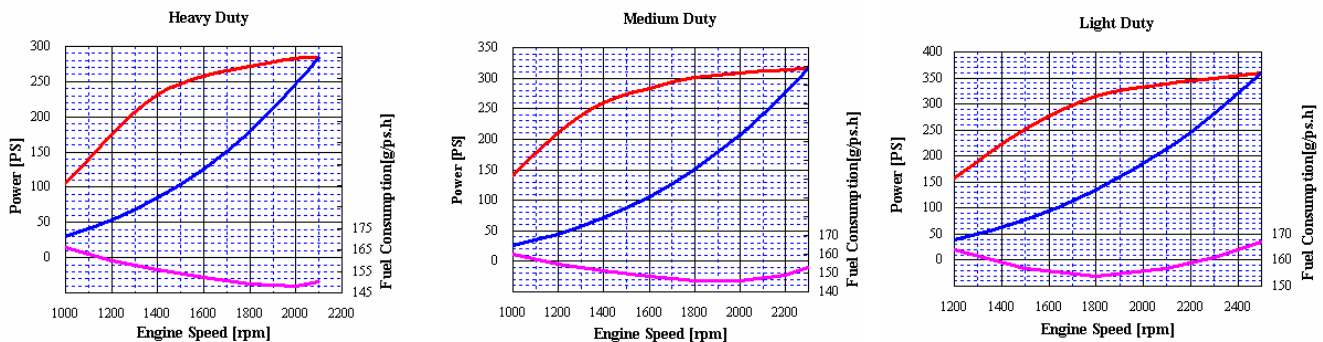


POWER RATING

Production tolerance : $\pm 3\%$

MODEL	CONDITIONS	POWER	rpm	Base Engine
L086TIH	HEAVY DUTY	285PS (210kW)	2,100	D1146TIB
L086TIM	MEDIUM DUTY	315PS (232kW)	2,300	
L086TIL	LIGHT DUTY	360PS (265kW)	2,500	

Note : 1) No reduction in rating for intake air temperature is up to 45 °C (318K) and sea water temperature is up to 32 °C (305K) , relative humidity is up to 60 % all data are based on operation to ISO 3046.

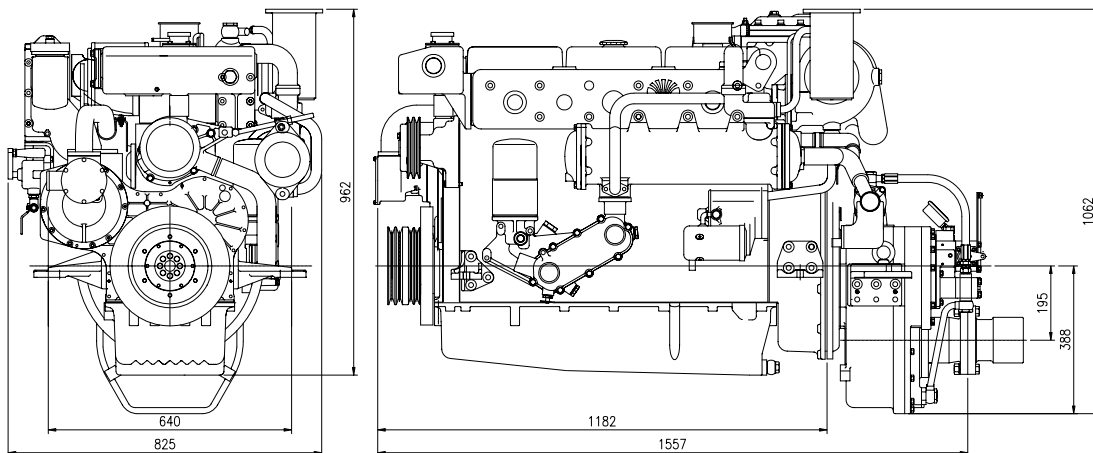

- **Heavy Duty :** Operation hours are unlimited per year, at average load is up to 90 % ,
At full load is up to 80 %
Typical gearbox ratio: 2.5 ~ 6
(Fishing trawler, Tug boat, Pushing vessel, Cargo boat, Freighter, Ferry)
- **Medium Duty :** Operation hours are up to 3,000 per year, at average load is up to 70 %
At full load is (up to 30 % / 4hrs per 12 hour operation period)
Typical gearbox ratio: 2 ~ 3.5
(Fishing boat, Pilot boat, Escort boat, Passenger boat, Ferry, Cruising vessel)
- **Light Duty :** Operation hours are up to 1,000 per year, at average load is up to 50 %
At full load is (up to 20 % / 2hrs per 12 hour operation period)
Typical gearbox ratio: 1 ~ 2.5
(Light weight fishing boat, Yacht, Coastguard boat, Fast boat, Fire pump)

Engine Specification			Units	L086TIH	L086TIM	L086TIL
Engine type				4 cycle, In line, direct- injection, water cooled with wet turbo charger & inter-cooler		
Rating output (B.H.P)			PS(kW)/rpm	285(210)/2,100	315(232)/2,300	360(265)/2,500
Displacement			cc	8,071		
Cylinder number - bore(φ) x stroke			mm	6 - φ111 x 139		
Valve clearance at cold	In / Ex		mm	0.3 / 0.3		
Low idling rpm			rpm	750 ± 25		
No load max. rpm			rpm	below 2,310	below 2,530	below 2,750
Mean effective pressure			kg/cm ²	15.14	14.55	16.06
Mean piston speed			m/sec.	9.73	10.66	11.58
Compression ratio				16.7 : 1		15.3:1
Firing order				1 - 5 - 3 - 6 - 2 - 4		
Compression pressure at 200 rpm			kg/cm ²	28 (Initial condition)		
Governor type of injection pump				Mechanical all speed (R.S.V)		
Fuel consumption			g/PS.h	152	163	167
			lit / h	52	62	72
Injection timing (B.T.D.C)			deg	15° ± 1°	15° ± 1°	15° ± 1°
Fuel inj. Nozzle opening pressure			kg/cm ²	224		
Starting system				Electric Starting by starter motor		
Starter motor capacity			V- kW	24 - 4.5		
Alternator capacity			V- A	24 - 50		
Battery			V- Ah	24 - 100		
Cooling system				Indirect sea water cooling with heat exchanger		
Cooling water capacity	Max. / Min.		lit	27 / 25		
Fresh water pump type				Centrifugal type, driven by V- belt		
Sea water pump type				Rubber impeller type driven by gear		
Lubricating oil (Engine)		pan capacity	lit	Max : 23, Min : 17 (Engine total : 25)		
		pressure	kg/cm ²	Full : 3.5, Idle : 1.2		
Marine gear		Model		DMT 110A (Dong - I)		
		Gear ratio		1.77 2.09 2.42 2.82 3.19		
Direction of revolution		crankshaft		Counter clockwise viewed from stern side		
		propeller		Clockwise viewed from stern side		
Engine size (L x W x H)		without M/G	mm	1,182 x 825 x 962		
		with M. gear	mm	1,552 x 825 x 1,062		
Engine dry weight		without M/G	kg	790		
		with M. gear	kg	1,015		

psi = kg/cm² x 14.22
 lb/ft. = N.m x 0.737
 kW = 0.2388 kcal/s

lb= kg x 2.205
 lb/PS.h = g/kW.h x 0.00162
 cfm = m³/min x 35.3

hp = PS x 0.98635
 U.S gal. = liter x 0.264

Head office
 7-11, Hwasu-Dong, Dong-Gu, Incheon, Korea
TEL : 82-32-760-1951, 1953 FAX : 82-32-761-2759
Seoul Office
 Doosan Infracore Co. Ltd.,
 22nd Floor, Doosan Tower, 18-12, Euljiro 6-ga, Jung-gu,
 Seoul, Korea.
TEL : 82-2-3398-8521-8536 FAX : 82-2-3398-8509
 Web site : www.doosaninfracore.com

※ Specifications are subject to change without prior notice.